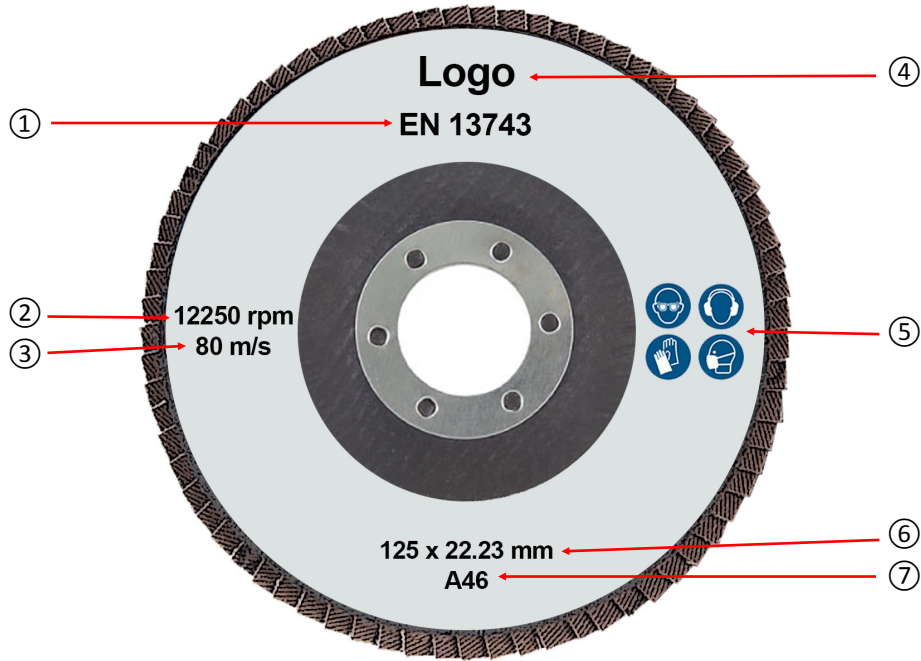


Explanation of marking required by EN 13743 *



1	Declaration of conformity
2	Maximum rotational frequency [rpm]
3	Maximum operating speed [m/s]
4	Name of manufacturer, supplier, importer, or Registered Trade Mark

5	Safety pictograms (PPE) (optional)
6	Dimensions [mm]
7	Specification mark (optional)

* EN 13743 marking shows that the producer has followed the essential safety requirements of the European safety standard for flap discs in order to reduce the risks for the end-user.

IMPORTANT NOTICE

Every effort has been made to ensure that all information supplied in this leaflet is accurate and up to date. We cannot accept, however, responsibility for any error or omission, nor for any consequential loss or damage so arising (E & OE).

© FEPA issue May 2016

More information on:

abrasives

safety

www.abrasivessafety.com

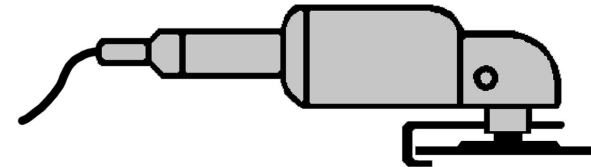
SAFETY RECOMMENDATIONS FOR THE USE OF FLAP DISCS FOR GRINDING WITH ANGLE GRINDERS

PASS ON THIS LEAFLET TO THOSE USING GRINDING DISCS

The recommendations contained in this leaflet should be followed by all users of abrasive products in the interests of their personal safety

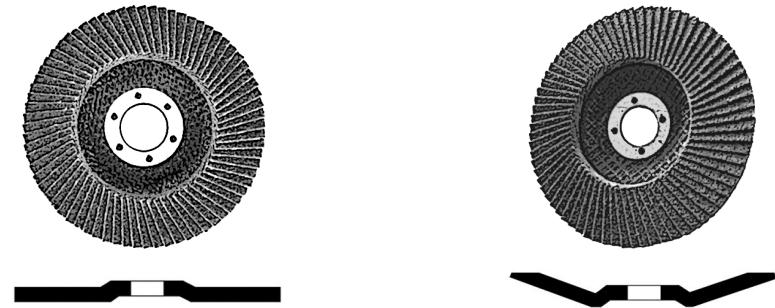
GENERAL PRINCIPLES OF SAFETY

Abrasive discs improperly used can be very dangerous. This leaflet covers the use of coated abrasive flap discs on angle grinders.



Read the machine handbook

Types of discs used for grinding

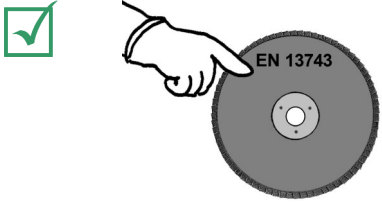
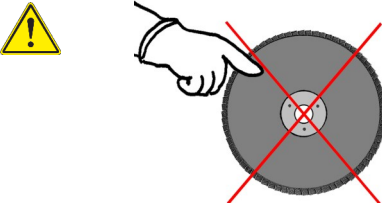

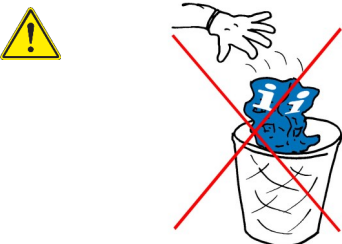

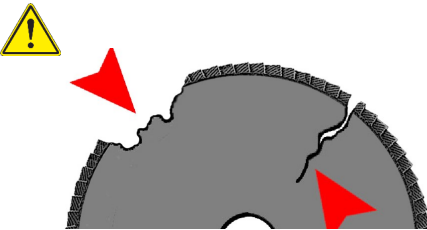
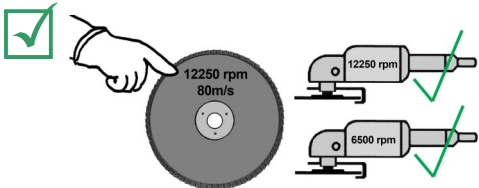
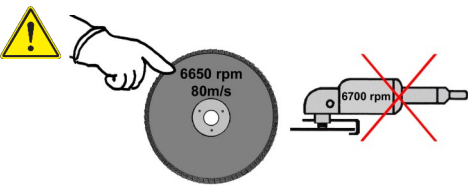
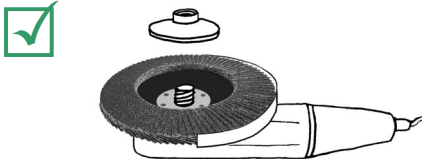
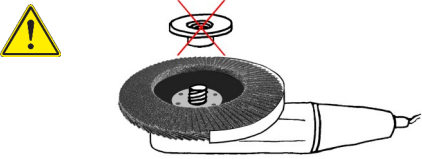


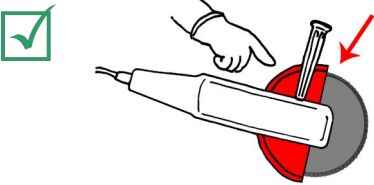
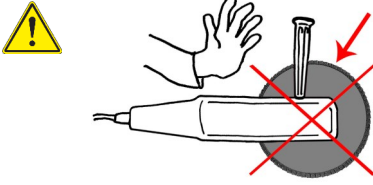
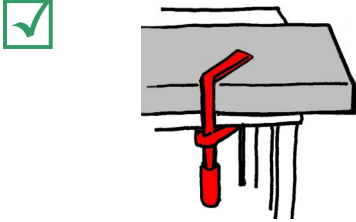

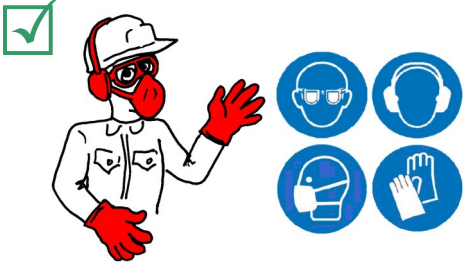
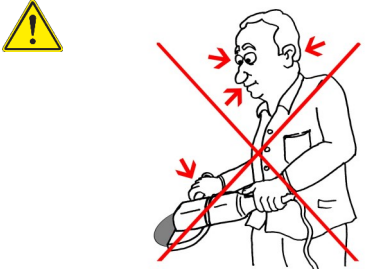
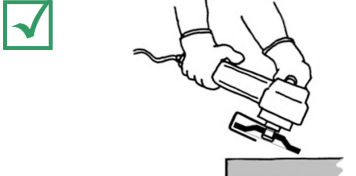

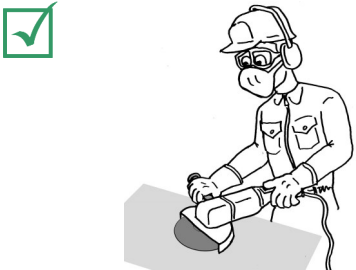
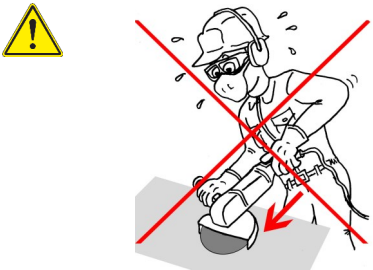
Types of guards recommended for grinding



For 180 & 230 mm diameter discs

For discs < 180 mm diameter

	DO'S	DON'TS
1	 <p>Ensure the disc bears the mark EN 13743</p>	 <p>Do not use a disc without the EN 13743 mark</p>
2	 <p>Always read the safety instructions</p>	 <p>Don't throw away the instructions before reading</p>
3	 <p>Examine the disc for damage or unusual stains</p>	 <p>Never use a damaged disc</p>
4	 <p>Check that the speed marked on the machine is not greater than the speed marked on the disc</p>	 <p>Do not use the disc if the speed is lower than the speed marked on the machine, or if no speed is marked on it</p>
5	 <p>Align flanges correctly</p>	 <p>Flanges incorrectly aligned</p>

	DO'S	DON'TS
6	 <p>Ensure the guard is fitted</p>	 <p>Never remove the guard</p>
7	 <p>Ensure work piece is secure</p>	 <p>Never grind an unstable work piece</p>
8	 <p>Use protective equipment</p>	 <p>Never grind without protective equipment</p>
9	 <p>Only use for grinding</p>	 <p>Do not use for cutting</p>
10	 <p>Work from side to side without excessive force</p>	 <p>Never force on the disc</p>

PRECAUTIONS AGAINST LIKELY HAZARDS

Noise

- Ear protection complying with EN352 is recommended for all applications where the workpiece or machine is hand-held, irrespective of the noise level.
- Ensure that the correct abrasive product is selected. An unsuitable product can produce excessive noise.

Vibration

- Processes where the workpiece or machine is hand-held can cause vibration injury.
- Action needs to be taken if tingling, pins and needles or numbness is experienced after 10 minutes continuous use of the abrasive product.
- The effects of vibration are more pronounced in cold conditions so keep the hands warm and exercise hands and fingers regularly. Use modern equipment with low vibration levels.
- Maintain all equipment in good condition and stop the machine and have it checked if excessive vibration occurs.
- Use good quality abrasive products and keep them in good condition during their life.
- Maintain mounting flanges and back-up pads in good condition and replace if worn or distorted.
- Do not grip the workpiece or machine too tightly and do not exert excessive pressure on the abrasive product.
- Avoid continuous use of the abrasive product.
- Use the correct product. An unsuitable product can produce excessive vibration.
- Don't ignore the physical symptoms of vibration - seek medical advice.

DISPOSAL OF ABRASIVES

- Used or defective abrasives should be disposed in accordance with local or national regulations.
- Further information can be obtained from Voluntary Product Information provided by the supplier.
- Be aware that the abrasive product may be contaminated with material from the workpiece or process after use.
- Disposed abrasive products should be damaged to prevent them from being taken from waste skips and re-used.

National Association

BAF
BRITISH
ABRASIVES
FEDERATION

Tel & Fax: +44 8456 121380

IMPORTANT NOTICE

Every effort has been made to ensure that all information supplied in this leaflet is accurate and up to date. We cannot accept, however, responsibility for any error or omission, nor for any consequential loss or damage so arising (E & OE).

© FEPA ISSUE June 2016



www.abrasivessafety.com



SAFETY RECOMMENDATIONS FOR THE USE OF ABRASIVE PRODUCTS

PASS ON THIS LEAFLET TO THOSE USING THE ABRASIVE PRODUCT

The recommendations contained in this leaflet should be followed by all users of abrasive products in the interests of their personal safety

GENERAL PRINCIPLES OF SAFETY

Abrasive products improperly used can be very dangerous.

- Always follow the instructions provided by the abrasive product and machine supplier.
- Ensure that the abrasive product is suitable for its intended use. Examine all abrasive products for damage or defects before mounting.
- Follow the correct procedures for handling and storage of abrasive products.

Be aware of the hazards likely during the use of abrasive products and observe the recommended precautions to be taken:

- Bodily contact with the abrasive product at operating speed
- Injury resulting from product breakage during use
- Grinding debris, sparks, fumes and dust generated by the grinding process
- Noise
- Vibration

Use only abrasive products conforming to the highest standards of safety. The following EN standards provide the essential safety requirements for relevant abrasives products:

- EN 12413 for Bonded Abrasives
- EN 13236 for Superabrasives
- EN 13743 for Specific Coated Abrasives (vulcanised fibre discs, flap wheels, flap discs and spindle-mounted flap wheels).

Never use a machine that is not in good working order or one with defective parts.

Employers should carry out a risk assessment on all individual abrasive processes to determine the appropriate protective measures necessary. They should ensure that their employees are suitably trained to carry out their duties.

This leaflet is only intended to provide basic safety recommendations. For more detailed information on the safe use of abrasive products, reference to our comprehensive Safety Codes is strongly recommended.

These are available from FEPA or your National Trade Association:

- FEPA Safety Code for Bonded Abrasives and Precision Superabrasives
- FEPA Safety Code for Superabrasives for Stone and Construction
- FEPA Safety Code for Coated Abrasives

PRECAUTIONS AGAINST LIKELY HAZARDS

Bodily contact with the abrasive product

- Always take great care and attention when using abrasive products. Tie back long hair and do not wear loose clothing, ties and jewellery.
- Prevent accidental start-up of the machine before mounting or changing an abrasive product. Isolate machines from their power source where necessary.
- Never remove guards from machines where fitted and ensure they are in good condition and properly adjusted before starting the machine.
- Always use gloves and suitable clothing where the workpiece or machine is hand-held. For gloves, a minimum protection level of EN 388 Category 2 is recommended.
- After switching off the machine, ensure the product has come to rest before leaving the machine unattended.

Injury caused by product breakage

- Always handle abrasives with great care, they are easily damaged. Examine all products for defects or damage before use.
- Store abrasives in dry, frost-free conditions avoiding wide variations in temperature. Ensure they are properly protected and supported to prevent damage and distortion.
- Coated abrasives should be stored at 18-22° C, 45-65% relative humidity.
- Abrasive belts should be hung on a rod or peg not less than 50mm diameter.
- Never use an abrasive product beyond its expiry date where marked. Observe the recommended shelf life for the following specific products; Resinoid and Shellac products 3 years, Rubber products 5 years, Vitriified products 10 years.
- Check abrasive product or package for any warnings or other safety information:

	Not permitted for hand-held machines
	Not permitted for wet grinding
	Not permitted for face grinding
	Do not use if damaged
	Only permitted with a back-up pad
-	Only permitted for wet cutting

-	Only permitted for use on totally enclosed machines
	Read the instructions
	Wear eye protection
	Wear hearing protection
	Wear gloves
	Wear a respirator

Injury caused by product breakage (continued)

- Ensure that the correct abrasive product is selected. Never use a product if it cannot be properly identified.
- Follow the instructions provided by the abrasive product or machine supplier when mounting abrasive products. Observe any mounting indications marked on the product such as direction of run or mounting position.
- Never force the abrasive product onto the mounting fixture or modify it to fit.
- Never exceed the maximum operating speed where specified.
- Check that the correct mounting devices are used and that they are undistorted, clean and free from burrs.
- Use mounting blotters where supplied.
- Do not tighten the mounting device excessively.
- After mounting or re-mounting an abrasive product, conduct a trial run at operating speed with the guard in place for at least 30 seconds, standing clear of the machine before use.
- Never remove guards from machines where fitted and ensure they are in good condition and properly adjusted.
- Ensure that the workpiece is secure and properly supported. Ensure that work rests are properly adjusted and secure.
- Never start the machine with the workpiece in contact with the abrasive product.
- Never apply excessive force or shock to the abrasive product or let it overheat.
- Do not grind on the part of the product that is not designed for the operation. Avoid grinding with the edge of abrasive belts, use the centre of the belt if possible.
- Avoid clogging and uneven wear to ensure that the abrasive product is working efficiently. Dress frequently where appropriate.
- Let the abrasive product stop naturally, not by applying pressure to its surface.
- Turn off and spin out excess coolant before stopping the machine.
- Do not leave abrasive belts under tension when not in use.

Grinding debris - sparks, dust and fumes

- Exposure to grinding debris can cause lung damage and other physical injuries.
- All dry grinding processes should be provided with adequate extraction facilities.
- Do not use abrasive products near flammable materials.
- The use of respirators complying with EN149 is recommended for dry grinding processes even if extraction systems are provided.
- Guards where provided should be adjusted to deflect sparks and debris away from the operator. Take additional measures to protect people working nearby.
- Eye protection is recommended for all machine applications for abrasives. For hand-held machines or workpiece, goggles or full-face shields with a minimum protection level of EN166 Grade B are recommended.
- Ensure that the correct abrasive product is selected. An unsuitable product can produce excessive debris and dust.